



108HC M10 SL All Black Module

108 Half-Cut Monocrystalline 380W – 410W

21.0%

Utilizes the latest M10 size super high efficiency Monocrystalline PERC cells. Half cut design further reduces cell to module (CTM) losses.

Hail Resistance

Framed Glass-backsheet construction is ideal for Hail resistance upto 55mm.

Anti-Reflective



Premium solar glass with anti reflective coating delivers more energy throughout the day.

High Reliability

Proven resistance to PID and reliable in high temperature and humidity environments.

No Compromise Guarantee

25 Year Product Warranty
25 Year Linear Performance Guarantee

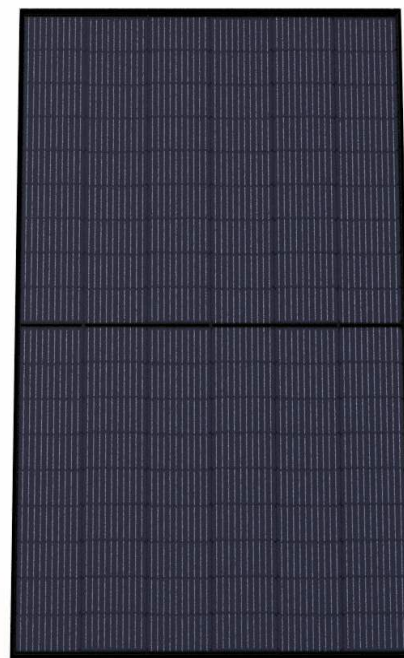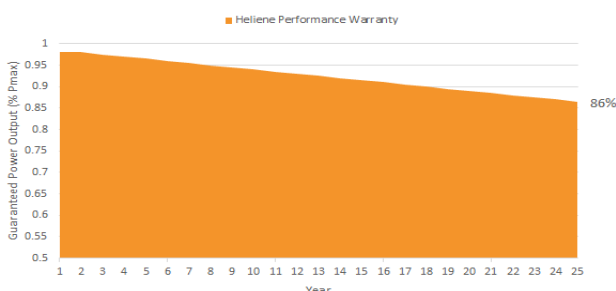

Manufactured Using International Quality System Standards: ISO9001

Half-Cut Design with Split Junction Box Technology

2% First year degradation & 0.5% Annual Power degradation

World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

Bankable Reputation

- Established in 2010, Heliene is recognized as highly bankable Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency

Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges





Technical drawing of the ESD-1000 enclosure, showing dimensions and features:

- Overall Dimensions:**
 - Height: 1722
 - Width: 1134
 - Top Panel Height: 261
 - Internal Width: 1085 x 4
- Drainage Features:**
 - 4 x Draining Holes 5 x 5
 - 8 x Draining Holes 8 x 3
- Internal Features:**
 - Mounting Hole x 8 Ø9 x 14
 - 35 x 2
 - Grounding Holes x 4 Ø4
- Section Views:**
 - A - A (1:10):** Shows a cross-section of the enclosure with a height of 35 and a width of 35.
 - B - B (1:10):** Shows a cross-section of the enclosure with a height of 35 and a width of 20.
- Other Dimensions:**
 - 800
 - 1200
 - 20 x 2
 - 35

HELIENE_108HC_410_M10_SL_ALL_BLACK

Incident Irrad. = 1000W/m² 382 W

Incident Irrad. = 800W/m² 306 W

Incident Irrad. = 600W/m² 229 W


Incident Irrad. = 400W/m² 152 W

Incident Irrad. = 200W/m² 74 W

Current [A]

Voltage [V]

At NMOT

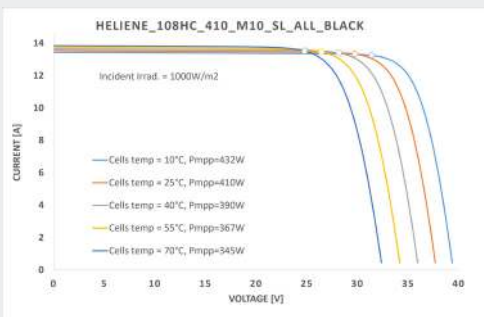[illegible]

*P_{max} Production Tolerance ± 3%, *V_{oc} Production Tolerance ± 5%, **I_{sc} Production Tolerance ± 5%

Maximum Power	P_{mpp} (W)	306	302	298	295	291	287	283
Maximum Power Voltage	V_{mpp} (V)	30.79	30.50	30.22	29.92	29.71	29.40	29.10
Maximum Power Current	I_{mpp} (A)	9.93	9.90	9.87	9.84	9.79	9.76	9.74
Open Circuit Voltage	V_{oc} (V)	35.88	35.79	35.68	35.51	35.36	35.10	34.98
Short Circuit Current	I_{sc} (A)	10.94	10.92	10.91	10.89	10.88	10.86	10.84

Irradiance at 800W/m², Ambient Temperature 20°C, Wind speed 1m/s

Solar Cells	108 Half-Cut, M10x, PERC Cells
Module Construction	Framed Glass–Backsheet
Dimensions (L x W x D)	1722 x 1134 x 35 mm (67.79 x 44.65 x 1.38 inch)
Weight	21.5 kg (47.4 lbs)
Frame	Double Webbed 15-Micron Anodized Aluminum Alloy
Glass	3.2mm Low-Iron Content, High-Transmission, PV Solar Glass with Anti Reflective Coating
Junction Box	IP-68 rated with 3 bypass diodes
Output Cables	4mm² (12AWG), 1.2-meter Symmetrical Cables (Standard) 0.3-meter Symmetrical Cables (Optional)
Connectors	Multi-Contact/ Stäubli MC4

UL Certification	UL61215, UL61730, CSA C22.2 No. 61730
------------------	---------------------------------------

Nominal Module Operating Temperature (NMOT)	+45°C(±2°C)
Temperature Coefficient of P _{max}	-0.34%/°C
Temperature Coefficient of V _{oc}	-0.25%/°C
Temperature Coefficient of I _{sc}	0.05%/°C

Operational Temperature	-40°C to +85°C
Max System Voltage	1000V
Mech. Load Test (Front)	113psf/ 5400Pa
Mech. Load Test (Back)	50 psf / 2400 Pa
Fire Rating	Type 1

25 Year Product Warranty

25 Year Linear Power Guarantee

Modules per Pallet 40' Container:	31 pieces
Modules per 40' Container:	806 pieces
Modules per Pallet 53' Trailer:	28 pieces
Modules per 53' Trailer:	728 pieces

