



# 120HC M10 SL Bifacial Module

120 Half-Cut Monocrystalline 420W – 440W

## 20.3%

Utilizes the latest M10 size super high efficiency Monocrystalline PERC cells. Half cut design further reduces cell to module (CTM) losses.

## Stability & Looks

Enhanced frame design to withstand higher wind, snow, and other mechanical stresses. Framed Glass-Backsheet aesthetic is ideal for high visibility installation.

## Anti-Reflective



Premium solar glass with anti reflective coating delivers more energy throughout the day

## High Reliability

Proven resistance to PID and reliable in high temperature and humidity environments.

## No Compromise Guarantee

15 Year Workmanship Warranty  
25 Year Linear Performance Guarantee

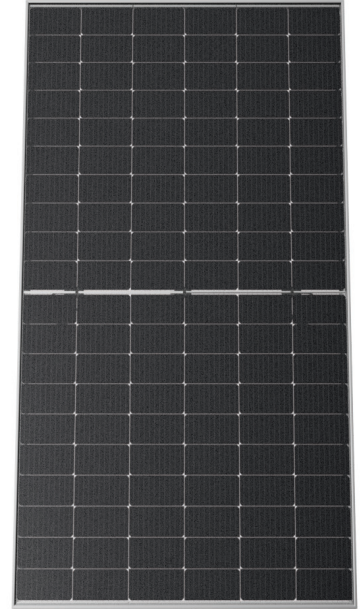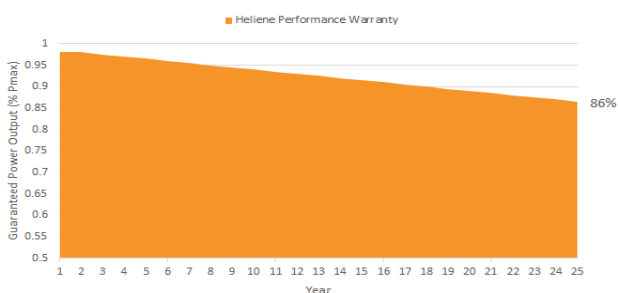

**Manufactured Using International Quality System Standards: ISO9001**

**Half-Cut Design with Split Junction Box Technology**

**Bifacial Technology Enabling Additional Energy Harvest from Rear Side**

**1500V System Voltage Rating**

### World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

### Bankable Reputation

- Established in 2010, Heliene is recognized as highly bankable Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency


### Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges







Dimensions for 120HC M10 SL Bifacial Series Modules

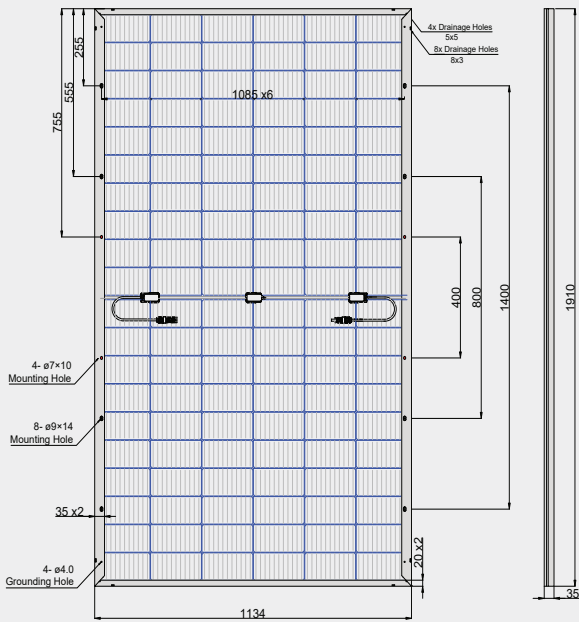

I-V Curves for 120HC M10 SL Bifacial Series Modules

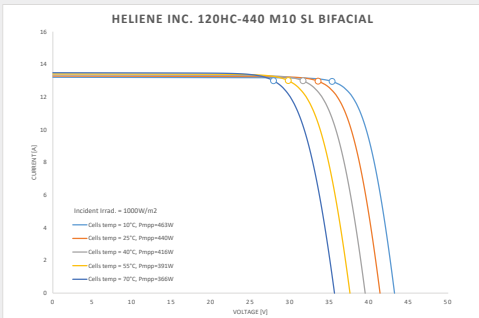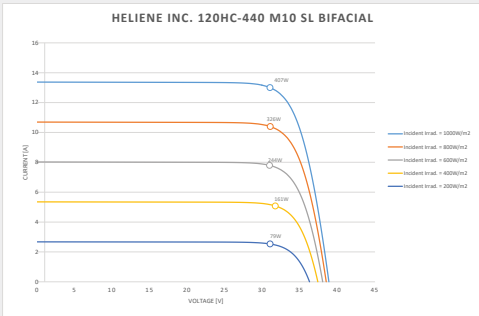

Certifications & Listing



Electrical Data (STC)

Table with 6 columns: Parameter, Unit, and five numerical values. Parameters include Peak Rated Power, Maximum Power Voltage, Maximum Power Current, Open Circuit Voltage, Short Circuit Current, Module Efficiency, Maximum Series Fuse Rating, Power Output Tolerance, and Bifaciality Factor.

STC - Standard Test Conditions: Irradiation 1000 W/m2 - Air mass AM 1.5 - Cell temperature 25 °C

Electrical Data (NMOT)

Table with 6 columns: Parameter, Unit, and five numerical values. Parameters include Maximum Power, Maximum Power Voltage, Maximum Power Current, Open Circuit Voltage, and Short Circuit Current.

NMOT - Nominal Module Operating Temperature: Irradiance at 800W/m2, Ambient Temperature 20°C, Wind speed 1m/s

Mechanical Data

Table with 2 columns: Parameter and Value. Parameters include Solar Cells, Module Construction, Dimensions, Weight, Frame, Glass, Junction Box, Output Cables, and Connectors.

Certifications

UL Certification UL61215, UL61730 pending

Temperature Ratings

Table with 2 columns: Parameter and Value. Parameters include Nominal Operating Cell Temperature (NOCT), Temperature Coefficient of Pmax, Temperature Coefficient of Voc, and Temperature Coefficient of Isc.

Maximum Ratings

Table with 2 columns: Parameter and Value. Parameters include Operational Temperature, Max System Voltage, Mech. Load Test (Front), Mech. Load Test (Back), and Fire Rating.

Warranty

- 15 Year Workmanship Warranty
25 Year Linear Power Guarantee

Packaging Configuration

Table with 2 columns: Parameter and Value. Parameters include Modules per box, Modules per 40' Container, and Modules per 53' trailer.



The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the ongoing innovation and product enhancements. Helene Inc. reserves the right to make necessary adjustment to the information described herein at any time without prior notice.