



132HC G12 HJT SL Bifacial Module

132 Half-Cut Monocrystalline 690W-710W

22.9%

Utilizes the latest G12 size super high efficiency N-type Monocrystalline HJT cells. Half cut design further reduces cell to module (CTM) losses.

Stability

Enhanced frame design to withstand higher wind, snow, and other mechanical stresses. Double glass robust design ensures long term durability.

High Energy Yield


Highest Efficiency, Excellent Bifaciality & Lower temperature coefficient of N-type HJT solar cells enable high energy yield.

High Reliability

HJT Cells based on N-type silicon result in extremely low LID & PID, reducing annual degradation and guaranteeing more power.

No Compromise Guarantee

15 Year Product Warranty
25 Year Linear Performance Guarantee

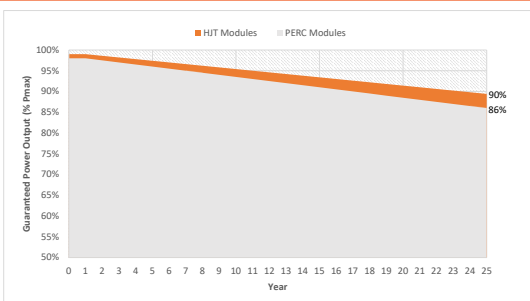

Highly Efficient N-type Solar Cells based on HJT Technology

Low LCOE enabled by High Power Output & Low BOS Cost

1% First year degradation & 0.4% Annual Power degradation

World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

Bankable Reputation

- Established in 2010, Heliene is recognized as highly bankable Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency

Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges





Electrical Data (STC)

Peak Rated Power*	P_{mpp} (W)	710	705	700	695	690
Maximum Power Voltage	V_{mpp} (V)	41.70	41.55	41.41	41.26	41.11
Maximum Power Current	I_{mpp} (A)	17.05	16.97	16.91	16.85	16.78
Open Circuit Voltage*	V_{oc} (V)	49.57	49.40	49.22	49.05	48.87
Short Circuit Current**	I_{sc} (A)	17.85	17.77	17.70	17.64	17.58
Module Efficiency	Eff (%)	22.86	22.70	22.53	22.37	22.21
Maximum Series Fuse Rating	MF (A)	30	30	30	30	30
Power Sorting Range		[- 0/+3%]				

Bifaciality Factor*** 85 ± 5%

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C,

* P_{mpp} Production Tolerance ± 3%, V_{oc} Production Tolerance ± 3%, ** I_{sc} Production Tolerance ± 4%,

***Bifaciality Factor = $P_{mpp_{rear}}/P_{mpp_{front}}$ where $P_{mpp_{rear}}$ and $P_{mpp_{front}}$ are tested at STC

Electrical Data (NMOT)

Maximum Power	P_{mpp} (W)	541	536	532	529	525
Maximum Power Voltage	V_{mpp} (V)	39.80	39.66	39.52	39.38	39.23
Maximum Power Current	I_{mpp} (A)	13.59	13.52	13.47	13.42	13.38
Open Circuit Voltage	V_{oc} (V)	47.31	47.14	46.98	46.81	49.64
Short Circuit Current	I_{sc} (A)	14.39	14.32	14.27	14.22	14.17

NMOT - Nominal Module Operating Temperature:

Irradiance at 800W/m², Ambient Temperature 20°C, Wind speed 1m/s

Mechanical Data

Solar Cells	132 Half-Cut, G12, 210mm, N-type Heterojunction Cells
Module Construction	Framed-Glass- Glass
Dimensions (L x W x D)	2384 x 1303 x 35 mm (93.86 x 51.30 x 1.38 inch)
Weight	38.7 kg (85.32 lbs)
Frame	Double Webbed 15-Micron Anodized Aluminum Alloy
Front Glass	2.0mm Low-Iron Content, High-Transmission, PV Solar Glass with Anti Reflective Coating
Back Glass	2.0mm Low-Iron Content, High-Transmission, White Pattern, PV Solar Glass
Junction Box	IP-68 rated with 3 bypass diodes
Output Cables	4mm ² (12 AWG), 0.3-meter Symmetrical Cables
Connectors	Multi-Contact/ Stäubli MC4

Certifications

UL Certification UL61215, UL61730 Pending

Temperature Ratings

Nominal Module Operating Temperature (NMOT)	+42°C (±2°C)
Temperature Coefficient of P_{max}	-0.26%/°C
Temperature Coefficient of V_{oc}	-0.24%/°C
Temperature Coefficient of I_{sc}	0.04%/°C

Maximum Ratings

Operational Temperature	-40°C to +85°C
Max System Voltage	1500V
Mech. Load Test (Front)	113 psf / 5400 Pa
Mech. Load Test (Back)	50 psf / 2400 Pa
Fire Rating	Type 1


Warranty

- 15 Year Product Warranty
- 25 Year Linear Power Guarantee

Packaging Configuration

Modules per Pallet 40' Container:	31 pieces
Modules per 40' Container:	558 pieces
Modules per Pallet 53' Trailer:	31 pieces
Modules per 53' Trailer:	496 pieces

Dimensions for 132HC G12 HJT SL Bifacial Series Modules

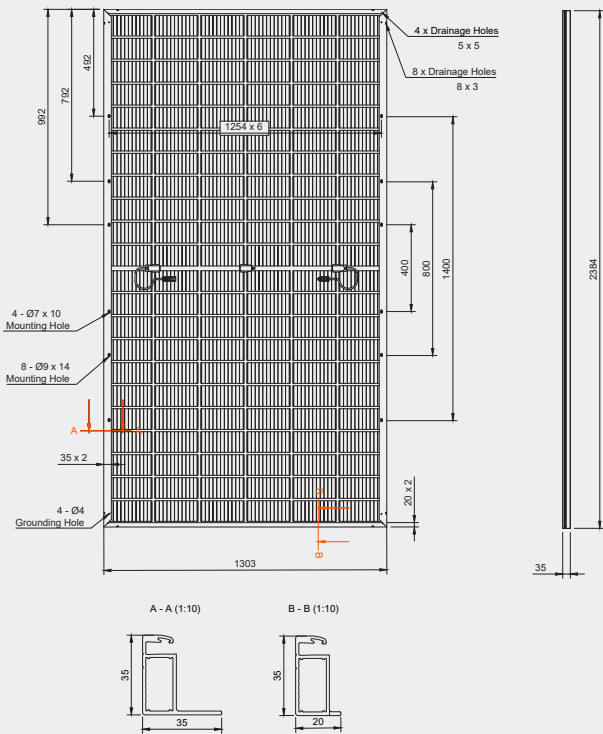

I-V Curves for 132HC G12 HJT SL Bifacial Series Modules

