



60M G1 All Black Module

60 Cell Monocrystalline 305W - 320W

19.2%

Utilizes the latest high efficiency Monocrystalline PERC cells.

Stability & Looks

Rugged, double webbed frame design withstands wind, snow, and other mechanical stresses. Framed Glass-Backsheet aesthetic is ideal for high visibility installation.

Anti-Reflective


Premium solar glass with anti reflective coating delivers more energy throughout the day

High Reliability

Proven resistance to PID and reliable in high temperature and humidity environments.

No Compromise Guarantee

15 Year Workmanship Warranty
25 Year Linear Performance Guarantee

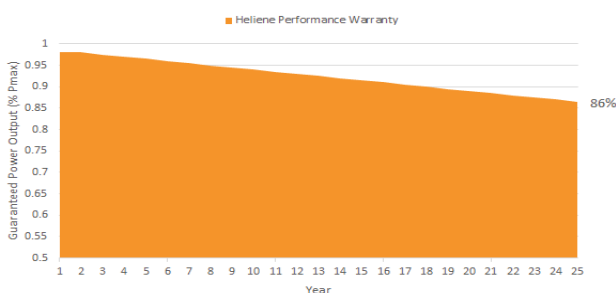

Manufactured Using International Quality System Standards: ISO9001

World-class Quality

- Heliene's fully automated manufacturing facilities with state-of-the-art robotics and computer aided inspection systems ensure the highest level of product quality and consistency
- All manufacturing locations are compliant with international quality standards and are ISO 9001 certified
- Heliene modules have received Top Performer rankings in several categories from PV Evolution Labs (PV EL) independent quality evaluations

Bankable Reputation

- Established in 2010, Heliene is recognized by Bloomberg New Energy Finance (BNEF) as Tier 1 manufacturer of solar modules and has been approved for use by the U.S. Department of Defense, U.S. Army Corps of Engineers and from numerous top tier utility scale project debt providers
- By investing heavily in research and development, Heliene has been able to stay on the cutting edge of advances in module technology and manufacturing efficiency


Local Sales, Service, and Support

- With sales offices across the U.S. and Canada, Heliene prides itself on unsurpassed customer support for our clients. Heliene has become the brand of choice for many of the leading residential installers, developers and Independent Power Producers due to our innovative technology, product customization capability and just in time last-mile logistics support
- Local sales and customer support means answered phone calls and immediate answers to your technical and logistics questions. We understand your project schedules often change with little warning and endeavor to work with you to solve your project management challenges





Dimensions for 60M G1 All Black Series Modules

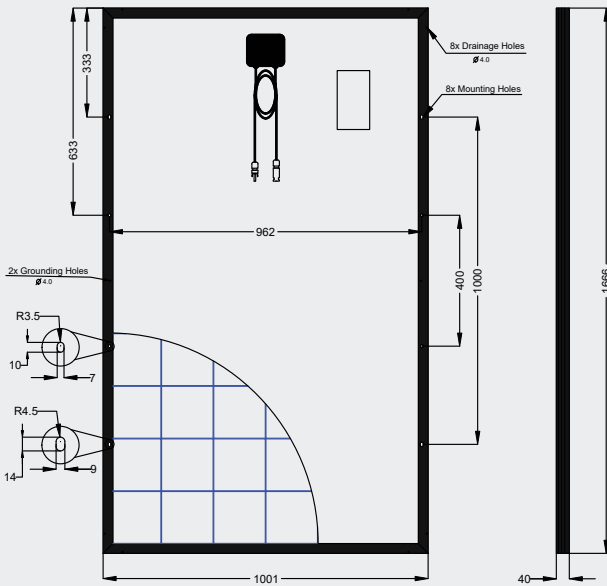

Electrical Data (STC)

Peak Rated Power	P_{mpp} (W)	320	315	310	305
Maximum Power Voltage	V_{mpp} (V)	34.10	33.70	33.54	33.60
Maximum Power Current	I_{mpp} (A)	9.37	9.33	9.27	9.07
Open Circuit Voltage	V_{oc} (V)	40.50	40.32	40.13	39.98
Short Circuit Current	I_{sc} (A)	10.20	10.16	10.22	9.67
Module Efficiency *	Eff (%)	19.21	18.92	18.78	18.28
Maximum Series Fuse Rating	MF (A)	20	20	20	20
Power Output Tolerance		[-3, +3] %			

STC - Standard Test Conditions: Irradiation 1000 W/m² - Air mass AM 1.5 - Cell temperature 25 °C
* Calculated using maximum power based on full positive output tolerance [-3, +3] %

Mechanical Data

Solar Cells	60 Monocrystalline cells (158.75 x 158.75 mm)
Module Construction	Framed Glass-Backsheet
Dimensions (L x W x D)	1666 x 1001 x 40 mm (65.5 x 39.4 x 1.6 inch)
Weight	19 kg (41.9 lbs)
Frame	Double Webbed 15-Micron Anodized Aluminum Alloy
Glass	3.2mm Low-Iron Content, High-Transmission, PV Solar Glass with Anti Reflective Coating
Junction Box	IP68 Rated Junction Box with 3 Bypass Diodes
Output Cables	1.2-meter (47.24-inch) Symmetrical Cables
Connectors	Multi-Contact (Staubli) MC4

Certifications

UL Certification UL61215, UL61730

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	+45°C (±2°C)
Temperature Coefficient of P_{max}	-0.36%/°C
Temperature Coefficient of V_{oc}	-0.30%/°C
Temperature Coefficient of I_{sc}	0.04%/°C

Packaging Configuration

Modules per box:	26 pieces
Modules per 53' trailer:	936 pieces



Maximum Ratings

Operational Temperature	-40°C - +85°C
Max System Voltage	1000V

Warranty

15Year Manufacturer's Workmanship Warranty
25 Year Linear Power Guarantee

I-V Curves for 60M G1 All Black Series Modules

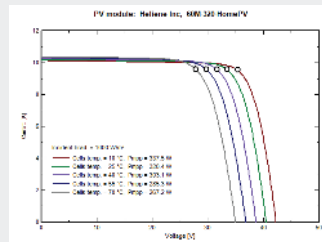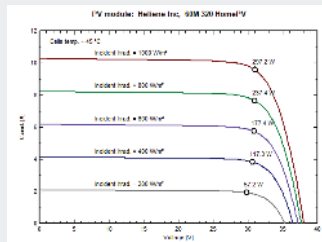

Certifications

